Sony PlayStation

The PlayStation (frequently referred to in shorthand as the PS1, PSOne or its codename PSX, not to be confused with the actual PSX) is a fifth generation console released by Sony Computer Entertainment on December 3, 1994 in Japan and September 9, 1995 in the US. It was retailed for $299.99. It had a R3000 CPU (which was used by NASA for a space craft to take pictures of Mars because of its reliability) at 33.8688 MHz with 2MB of RAM and 1MB of VRAM. It used a proprietary MDEC video compression unit, which is integrated into the CPU, allowing for playback of full motion video at a higher quality than other consoles of its generation. It also had a superior digital-to-analog converter than most CD players at the time.

It was a commercial success, partly due to Sony encouraging third-party developers with affordable dev-kits, being relatively easy to program for (compared to others at the time) and because its CD-based media was cheaper than the competition.

This system scrapes metadata for the `psx` group(s) and loads the `psx` set from the currently selected theme, if available.



Quick reference

- **Folder:** `roms/psx/`
- **BIOS required?** Optional, some games require one.

Emulators	Accepted ROM formats	BIOS files	Configuration via
DuckStation	`.cue .img .mdf .pbp .toc .cbn .m3u .ccd .chd .iso`	`psxonpsp660.bin scph101.bin scph1001.bin scph5500.bin scph5501.bin scph5502.bin scph7001.bin`	EmulationStation and duckstation-config

Emulators	Accepted ROM formats	BIOS files	Configuration via
Libretro/mednafen psx	.cue .pbp .toc .m3u .ccd .chd	psxonpsp660.bin scph5500.bin scph5501.bin scph5502.bin	EmulationStation and RetroArch
Libretro/PCSX ReARMed	.bin .cue .img .mdf .pbp .toc .cbn .m3u .ccd .chd	psxonpsp660.bin scph101.bin scph1001.bin scph5501.bin scph7001.bin	EmulationStation and RetroArch
Libretro/SwanStation	.cue .img .mdf .pbp .toc .cbn .m3u .ccd .chd .iso	psxonpsp660.bin scph101.bin scph1001.bin scph5500.bin scph5501.bin scph5502.bin scph7001.bin	EmulationStation and RetroArch

BIOS

The BIOS files aren't strictly required for emulation, but can dramatically improve compatibility and accuracy. As a replacement for any of the first 3 BIOS files mentioned above, it is also possible to use the PSXONPSP660.bin BIOS. This BIOS comes from the PSP, is region-free and can sometimes offer better performance. Their md5 checksums and expected paths are as follows:

MD5 checksum	Share file path	Description
c53ca5908936d412331790f4426c6c33	bios/psxonpsp660.bin	Extracted from a PSP
6e3735ff4c7dc899ee98981385f6f3d0	bios/scph101.bin	Version 4.4 03/24/00
dc2b9bf8da62ec93e868cfd29f0d067d	bios/scph1001.bin	Version 2.0 05/07/95
8dd7d5296a650fac7319bce665a6a53c	bios/scph5500.bin	PS1 JP BIOS
490f666e1afb15b7362b406ed1cea246	bios/scph5501.bin	Version 3.0 11/18/96 PS1 US BIOS
32736f17079d0b2b7024407c39bd3050	bios/scph5502.bin	PS1 EU BIOS
1e68c231d0896b7eadcad1d7d8e76129	bios/scph7001.bin	Version 4.1 12/16/97

ROMs

PlayStation ROMs typically come in the modern .cue/.bin format. The .cue sheets contain the metadata of where the 'data tracks' on the disc are physically located, and the .bin files are the actual data. They must retain the same filename (the .cue file is just a text file that points to the .bin file) and be in the same directory to function together. When loading PSX ROMs, be sure to select the .cue file, not the .bin file. Some games may work (with glitches) with just the .bin file loaded, but most don't. Refer to CD image formats for more info.

Older PlayStation ROMs may have been ripped in `.iso` image format, which is a direct representation of the data on the disc. Some emulators are incompatible with this format. This format typically only allows loading the first `.bin` file, and no others. In order to properly use the ROM like this, get the `.img` file and pair it with its CUE sheet. There are tools that can do this automatically for you.

`.pbp` is a proprietary format made by Sony to store PlayStation games (even multi-disc ones) in a compressed format for their PS1-on-PSP downloadable content games. There are tools to convert to and from this format. Using this format is **not** recommended as it can cause issues with certain games.

The `.cue` and `.bin` files are combined when compressed into a CHD file, so only the `.chd` file needs to be present and loaded. This is the recommended format.

Place your Sony PlayStation ROMs in `/userdata/roms/psx/`.

Playing PAL copy-protected games

PAL copy protected games need a SBI subchannel file next to the `.bin`/`.cue`/`.chd` files in order to get past the copy-protection. For example:

```
Game (Europe).bin
Game (Europe).cue
Game (Europe).sbi
```

For proper PAL game compatibility, DuckStation should be set to show the BIOS animation, PCSX-ReARMED should be set to skip the BIOS animation (unless using a real BIOS) and Mednafen should be set to skip the BIOS animation (unless using a real BIOS).

Multi disc games

To automatically load the next disc of a game, you can use a .m3u playlist file. To make one, simply create a text file with the same filename as your intended game name (it could be anything, really). Within that text file, write the names of the .cue sheets or .chd files for your game discs. For instance, if your game's .cue sheets were structured like

```
roms/
└─ psx/
   ├─ Final Fantasy VII (Disc 1).cue
   ├─ Final Fantasy VII (Disc 1).bin
   ├─ Final Fantasy VII (Disc 2).cue
   ├─ Final Fantasy VII (Disc 2).bin
   ├─ Final Fantasy VII (Disc 3).cue
   └─ Final Fantasy VII (Disc 3).bin
```

you would put the following as text into the `Final Fantasy VII.m3u` text file:

Final Fantasy VII.m3u

```
Final Fantasy VII (Disc 1).cue
Final Fantasy VII (Disc 2).cue
Final Fantasy VII (Disc 3).cue
```

Save the text file with the file extension .m3u and place it in the `psx` folder along with the game's discs. When you get to the end of that disc, the next disc will be automatically loaded. If this fails, you can utilize Retroarch's 'Disc Control' menu in the Quick Menu (Hotkey+South button in-game) to eject a disc and insert another (Swap Disc is for legacy purposes and should not be used). Refer to multi-

disc games for more info.

Emulators

DuckStation

DuckStation is focused on playability, speed, and long-term maintainability. The goal of the emulator is to be as accurate as possible while maintaining performance on a broad range of devices. “Hack” options are discouraged, and the default configuration should support all playable games with only some of the enhancements having compatibility issues. 64-bit CPUs are required for recompiler support for maximum performance.

Batocera uses the latest standalone version of Duckstation. Performs well on lower end x86_64 systems.

DuckStation configuration

Standardized features available to all cores of this emulator: `psx.videomode`, `psx.ratio`

ES setting name `batocera.conf` key	**Description ⇒ ES option key `value`**
REWIND `psx.duckstation_rewind`	Warning, this feature uses a lot of RAM & VRAM ⇒ Off `false`, 5 sec Accurate / 250 Mo RAM + 1200 Mo VRAM `5`, 10 sec Accurate / 500 Mo RAM + 2400 Mo VRAM `10`, 15 sec / Total 135 Mo RAM (Small boards) `15`, 30 sec / Total 270 Mo RAM (Middle boards) `30`, 60 sec / 300 Mo RAM + 240 Mo VRAM `60`, 90 sec / 450 Mo RAM + 360 Mo VRAM `90`, 120 sec / 600 Mo RAM + 480 Mo VRAM `120`.
GRAPHICS BACKEND `psx.gfxbackend`	Choose your graphics rendering ⇒ OpenGL `OpenGL`, Vulkan `Vulkan`.
CPU EXECUTION MODE `psx.duckstation_executionmode`	Interpreter is the more accurate but the slowest ⇒ Recompiler (Fastest) `Interpreter`, Cached Interpreter (Faster) `CachedInterpreter`, Interpreter (Slowest) `Recompiler`.
VULKAN THREADED `psx.duckstation_threadedpresentation`	Turns on threaded rendering for Vulkan. Presents frames on a background thread when fast-forward or V-sync is disabled. Considerably improves performance. If using V-sync, only improves fast-forward so it is safe to leave it on. ⇒ Off `0`, On `1`.

ES setting name `batocera.conf` key	Description ⇒ ES option key `value`
VSYNC `psx.duckstation_vsync`	Turns on V-sync to avoid screen tearing. Introduces a negligible amount of input delay. Significant performance cost. Only should be disabled if experiencing slowdown. ⇒ Off `0`, On `1`.
FRAME SKIP `psx.duckstation_frameskip`	Skips frames to improve performance. Values: `0` for off, `1` for on. Can cause motion sickness if enabled, only use if the game is unplayable without it. ⇒ Off `0`, On `1`.
SHOW BIOS BOOTLOGO `psx.duckstation_PatchFastBoot`	Enhancement. Skips the BIOS boot animation. Some games require the animation to function correctly, most can skip it fine. `1` to skip, `0` to show. Duckstation uses the official BIOS, some games look for this specific animation before booting so turn it on for those games. ⇒ Off `1`, On `0`.
VIDEO RESOLUTION `psx.duckstation_resolution_scale`	Enhancement. Multiplies the internal rendering resolution. Improves the clarity of 3D objects. Extreme performance cost. ⇒ 1x(native) `1`, 2x `2`, 3x/720p `3`, 4x `4`, 5x/1080p `5`, 6x/1440p `6`, 7x `7`, 8x `8`, 9x/4K `9`, 10x `10`, 11x `11`, 12x `12`, 13x `13`, 14x `14`, 15x `15`, 16x `16`.
ANTI-ALIASING (MSAA/SSAA) `psx.duckstation_antialiasing`	Enhancement. Applies MSAA or SSAA to smooth out jagged edges on 3D object polygons. Most noticeable at lower resolutions. Does not affect textures. The sharp edges of polygons are usually masked by the blurry video output of the PSX, but digital displays may feature them more prominently. This can alleviate that. The PSX does not have any native anti-aliasing. Enabling this can cause rendering errors. Cheaper than multiplying the rendering resolution, but not by much. ⇒ Off `1`, 2x MSAA `2`, 4x MSAA `4`, 8x MSAA `8`, 16x MSAA `16`, 32x MSAA `32`, 2x SSAA `2-ssaa`, 4x SSAA `4-ssaa`, 8x SSAA `8-ssaa`, 16x SSAA `16-ssaa`, 32x SSAA `32-ssaa`.
TEXTURE FILTERING `psx.duckstation_texture_filtering`	Enhancement. Applies texture filtering to all textures. Minimal performance cost. `Nearest` for an authentic experience, `Bilinear` for a “neutral” improvement (think N64), xBR/`Jinc2` for smart upscaling (subjective improvement). Edge blending refers to the transparent edges, can make some objects look nicer while other objects look glitchier. ⇒ Nearest-Neighbor `Nearest`, Bilinear `Bilinear`, Bilinear (no edge blending) `BilinearBinAlpha`, JINC2 `Jinc2`, JINC2 (no edge blending) `Jinc2BinAlpha`, xBR xBR, xBR (no edge blending) xBR`BinAlpha`.

ES setting name `batocera.conf` key	Description ⇒ ES option key `value`
CROP MODE `psx.duckstation_CropMode`	Zooms in the display to hide black borders. Not all PSX games have the same sized black borders. ⇒ Off `None`, Only Overscan Area `Overscan`, All Borders `Borders`.
WIDESCREEN HACK `psx.duckstation_widescreen_hack`	Enhancement. Widescreen hack. Very glitchy. Only works when using a 16:9 video mode **and** with bezels (decorations) disabled. `0` for disabled, `1` for enabled. Recommended to use game patches where possible instead. Some games natively support 16:9 in their in-game options. ⇒ Off `0`, On `1`.
CONSOLE REGION `psx.duckstation_region`	Changes the region of the emulated console. Region-locking is disabled so setting this isn't necessary, but some games will run at weird framerates if using out-of-region consoles. Duckstation will detect and switch to the right region unless specified otherwise. ⇒ Europe-Australia `PAL`, USA-Canada `NTSC-U`, Japan `NTSC-J`.
FORCE 60HZ `psx.duckstation_60hz`	Enhancement. Forces 50Hz PAL games to run at 60Hz. Has issues with certain games that tie framerate to logic, but most games (ones that use a variable FPS) should be fine. ⇒ Off `0`, On `1`.
CUSTOM TEXTURES `psx.duckstation_custom_textures`	Enhancement. Uses the hi-res texture pack for the game, if any. `0` for off, `normal` to load from disk as needed, `preload` to load textures into RAM first (increases boot time). Safe to leave on if no texture pack is present. ⇒ Off `0`, Normal `normal`, Preload `preload`.
RUMBLE `psx.duckstation_rumble`	Activates rumble on supported controllers. Requires the Dualshock controller, Namco GunCon or NeGcon and a compatible game. ⇒ Off `0`, On `1`.
DPAD TO JOYSTICK `psx.duckstation_digitalmode`	Activates Joystick to D-pad, allowing the Joystick to function as a virtual D-pad. Useful for games that only support the digital controller. ⇒ Off `0`, On `1`.
MULTITAP `psx.duckstation_multitap`	Enables multitap for the specified port(s). Not all games utilized it and may have issues with it on. Generally safe to leave on for port 2, though. ⇒ Off `Disabled`, Port 1 `Port1Only`, Port 2 `Port2Only`, Port 1+2 `BothPorts`.

ES setting name `batocera.conf` key	Description ⇒ ES option key value
CONTROLLER 1 TYPE **`psx.duckstation_Controller1`**	Refer to Controls. ⇒ None `None`, Digital Controller `DigitalController`, Analog Controller (DualShock) `AnalogController`, Analog Joystick `AnalogJoystick`, Namco GunCon (Rumble) `NamcoGunCon`, PlayStation Mouse `PlayStationMouse`, NeGcon (Rumble) `NeGcon`.
CONTROLLER 2 TYPE **`psx.duckstation_Controller2`**	Same as above but for port 2.

Other configuration settings must be configured from within DuckStation's standalone emu-config (`[F1]` on the systems list → Applications).

Libretro/Mednafen PSX

Beetle PSX is a standalone fork of Mednafen PSX to the Libretro API. Offers a lot of options to enhance graphics and geometry. Highly recommended for x86_64 systems with a decent GPU.

Libretro/Mednafen PSX configuration

ES option name and `batocera.conf` line	Description
SHOW BIOS BOOTLOGO **`psx.beetle_psx_skip_bios`**	Enhancement. Skip the BIOS animation when starting content. `disabled`. Can be enabled but some games may have issues, notably copy protected PAL games.
OVERCLOCKING (HEAVY CPU) **`psx.beetle_psx_cpu_freq_scale`**	Enhancement. Enable overclocking (or underclocking) of the emulated PSX's CPU. The default frequency of the MIPS R3000A-compatible 32-bit RISC CPU is 33.8688 MHz; running at higher frequencies can eliminate slowdown and improve frame rates in certain games at the expense of increased performance requirements. Values: `50%`, `60%`, `70%` all the way up to `160%`. Exception: `100%(native)`. `100%(native)`. Overclocking can lead to audio and video desynchronization on certain games, underclocking can improve performance on weak devices.
VIDEO RESOLUTION **`psx.beetle_psx_internal_resolution`**	Enhancement. Increases the rendering resolution for 3D geometry. 2D elements are generally unaffected by this setting from the core's perspective. Significant performance cost. Values: `1x(native)`, 2x, 4x, 8x or 16x. `1x(native)`. Although not exact, set to 4x for 1080p resolution.

ES option name and `batocera.conf` line	Description
WIDESCREEN HACK **`psx.beetle_psx_widescreen_hack`**	Enhancement. Forces content to be rendered with an aspect ratio of 16:9. Produces best results with fully 3D games. Can cause graphical glitches or alignment/stretching issues in games that mix 3D and 2D elements. `disabled` Recommended to use game patches instead. Some games natively support 16:9 in their in-game options.
FRAME DUPING (SPEED UP) **`psx.beetle_psx_frame_duping`**	Enhancement. When enabled, provides a small performance increase by redrawing/reusing the last rendered frame (instead of presenting a new one) if the content of the current frame is unchanged based on the internal fps heuristic. `disabled`, enabling may cause inaccurate behavior or lost animation frames.
CPU DYNAREC (SPEED UP) **`psx.beetle_psx_cpu_dynarec`**	Dynamically recompile CPU instructions to native instructions. Much faster than interpreter, but CPU timing is less accurate, and may have bugs. Extreme performance cost if disabled. Values: `disabled` for native interpreter, `execute` for max performance, `execute_once` for cycle-timing check or `run_interpreter` for lightrec interpreter. `disabled`, only enable if on a weak device.
DYNAREC CODE INVALIDATION **`psx.beetle_psx_dynarec_invalidate`**	Switches between full invalidation mode and DMA only mode. DMA only mode is slightly faster, however some games require full invalidation to run correctly. This option has no effect when `beetle_psx_cpu_dynarec` is not enabled. Values: `full` or `dma` `full`, only use `dma` on weak devices.
MULTITAP `psx.multitap_mednafen`	Enables/Disables multitap functionality and allows up to 8 players. Values: `disabled`, `port1`, `port2`, `port12` for two multi-taps. `disabled`, not all games utilized it and may have issues with it on. Generally safe to leave on for port 2, though.
CONTROLLER 1 TYPE **`psx.beetle_psx_controller1`**	Refer to Controls. Values: 1 for digital controller, 261 for analog controller, 517 for dualshock controller, 773 for analog flystick, 260 for Namco GunCon, 1029 for neGcon or 258 for PlayStation Mouse. 1, unless you know your game supports a later controller.
CONTROLLER 2 TYPE **`psx.beetle_psx_controller2`**	Same as above but for port 2.

Other configuration settings must be configured from RetroArch's Quick Menu (Hotkey+).

Libretro/PCSX ReARMed

PCSX ReARMed is an optimized PCSX fork for ARM based systems like the Raspberry Pi, but also works on x86.

Libretro/PCSX ReARMed configuration

ES option name and `batocera.conf` line	Description
SHOW BIOS BOOTLOGO **`psx.show_bios_bootlogo`**	Shows the BIOS boot animation when starting the game. In PCSX ReARMed, this can cause some games to break when turned on. `disabled` PCSX uses an emulated BIOS by default, running *this* emulated BIOSs' animation can cause some games to malfunction. Games that require the proper BIOS animation require an official BIOS present.
FRAMESKIP **`psx.frameskip_pcsx`**	Skip frames to improve performance. Can cause motion sickness if set to high values. Values: `0`, 1, 2 or 3. Can cause motion sickness if set high. Only use if the game is unplayable without it.
ENHANCED RESOLUTION (SLOWER) **`psx.neon_enhancement`**	Enhancement. Doubles the internal rendering resolution. Extreme performance cost. Values: `disabled`, `enabled` or `enabled_with_speedhack`. `disabled` for native, `enabled` if your system is strong enough. `enabled_with_speedhack` is not recommended as it can cause glitches.
MULTITAP **`psx.multitap_pcsx`**	Enables multitap on the selected port. Values: `disabled`, `port1`, `port2` or `port12` for both ports. `disabled`, most games don't utilize multitap, but is generally safe to leave in port2.
ADDITIONAL GAME FIXES **`psx.game_fixes_pcsx`**	Enables a per-game fix. Values: `Capcom_fighting`, `Chrono_Chross`, `Dark_Forces`, `Diablo_Music`, `Lunar`, `InuYasha_Sengoku`, `Pandemonium` or `Parasite_Eve`. This shouldn't need to be changed if the game has been successfully scraped.
CONTROLLER 1 TYPE **`psx.controller1_pcsx`**	Refer to Controls. Values: 1 for digital, 261 for analog controller, 517 for dualshock controller, 260 for Namco GunCon, 773 for neGcon, 258 for PlayStation Mouse. 1 unless you know your game supports a later controller.
CONTROLLER 2 TYPE **`psx.controller2_pcsx`**	Same as above but for port 2.

Other configuration settings must be configured from RetroArch's Quick Menu (Hotkey+).

Libretro/SwanStation

SwanStation is a port of an older version of DuckStation to a libretro core. This version does not receive the same upstream patches that DuckStation currently does, so as time goes on the feature set between this and DuckStation will diverge further.

SwanStation shares its configuration with Duckstation, but omits `threaded_presentation`, `vsync`, `frameskip`, `region`, `custom_textures`, `rumble`, `digital_mode` and `multitap` (correct as of v31). These settings can still be adjusted with RetroArch's Quick Menu (Hotkey+).

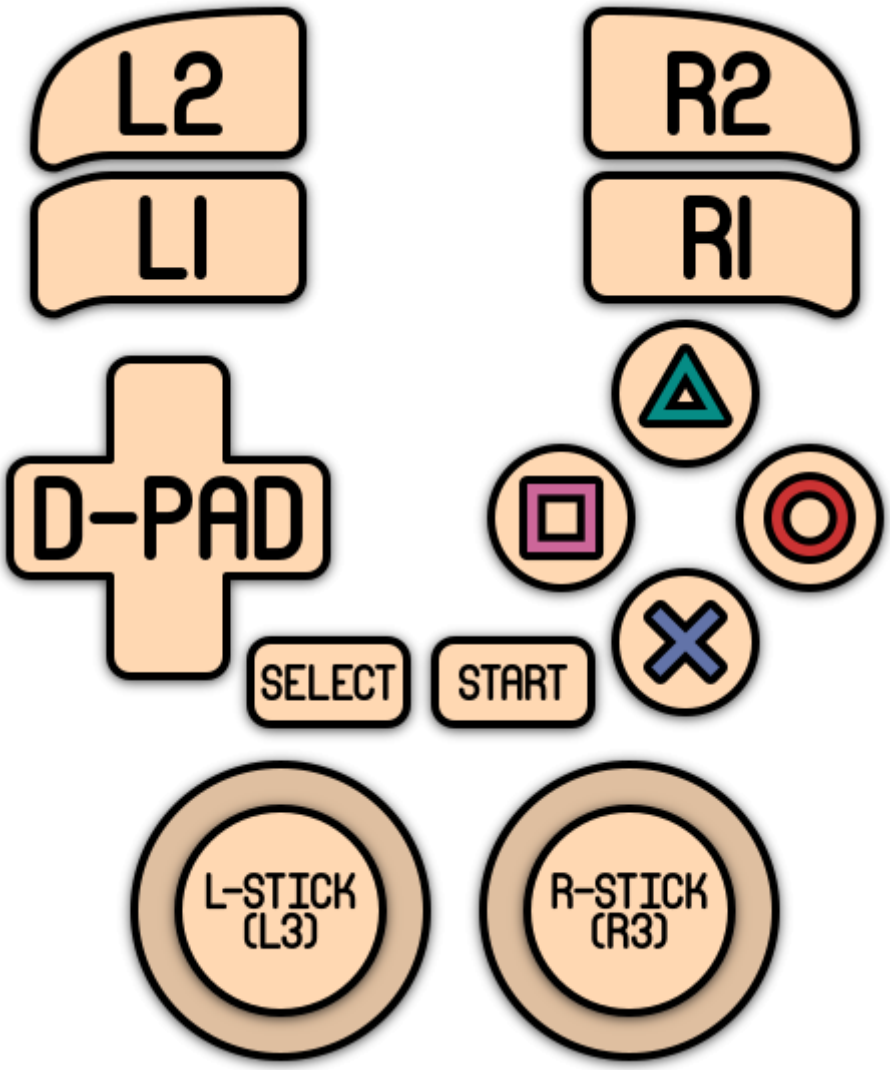
Controls

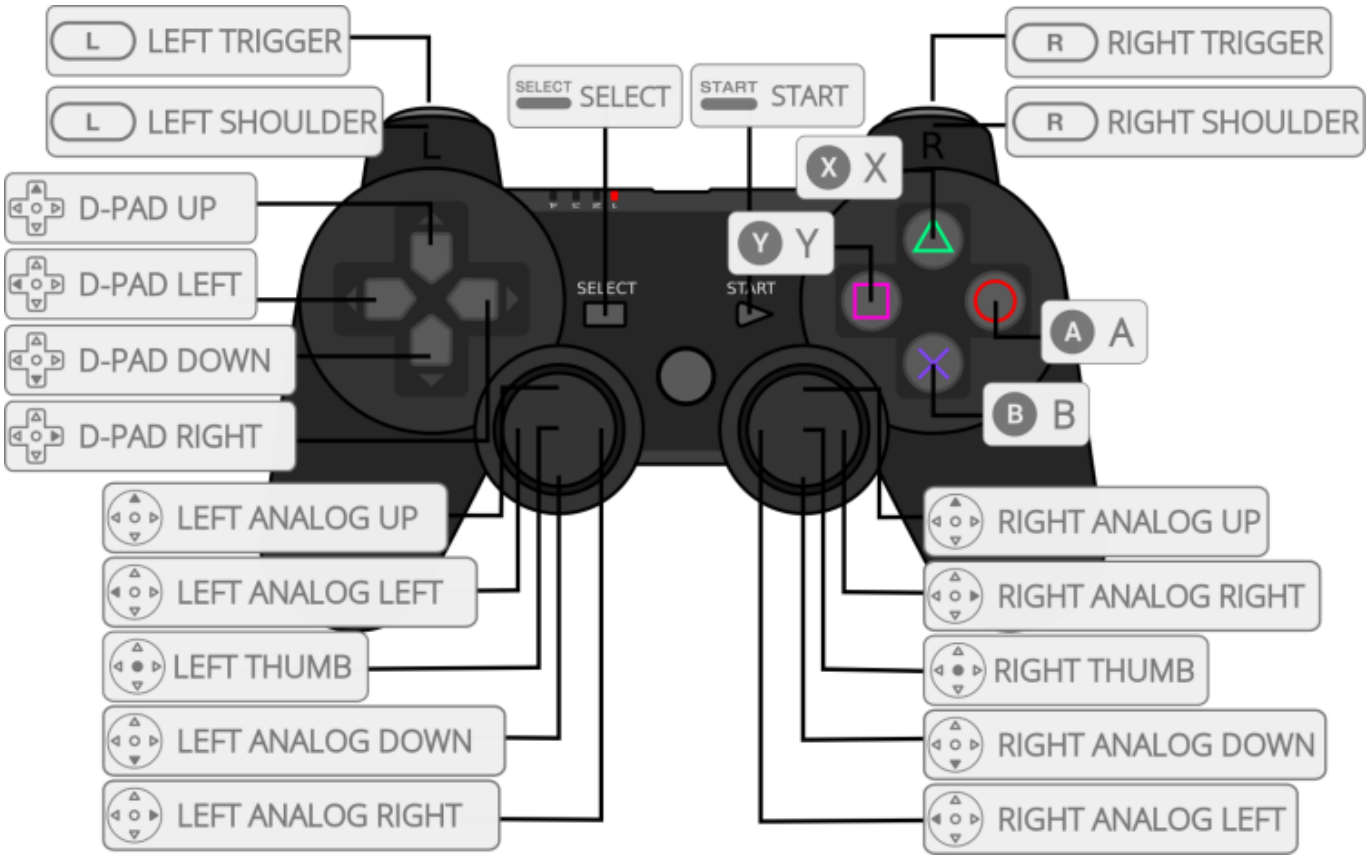


The PlayStation had many types of controllers throughout its life, starting with the digital controller which only had a D-pad, face buttons and shoulder buttons, then the Analog controller which added two joysticks to the center and finally the DualShock which added vibration. A game needs to explicitly support a controller to function with it, most supported at least the digital controller. The Analog and Dualshock controller had an “Analog” button to switch between being its native self or a virtual digital controller so it could function with older games; this is generally not emulated yet so the best recommendation is to stick with digital controllers unless you know your game explicitly supports a later one. By default, Batocera will enable Joystick to D-pad so that the joystick will function as a virtual D-pad.

The PlayStation also had alternative controllers such as the dance mat (same as the digital controller) or the analog joystick (same as the analog controller). Other controllers such as the Namco GunCon, the neGcon or the PlayStation Mouse would use their own interface, requiring the game to specifically support it.

The default button mapping to the PSX controller is as follows:


L2
R2
L1
R1
D-PAD
SELECT
START
L-STICK
(L3)
R-STICK
(R3)


L LEFT TRIGGER
L LEFT SHOULDER
D-PAD UP
D-PAD LEFT
D-PAD DOWN
D-PAD RIGHT
LEFT ANALOG UP
LEFT ANALOG LEFT
LEFT THUMB
LEFT ANALOG DOWN
LEFT ANALOG RIGHT
SELECT SELECT
START START
SELECT
START
R RIGHT TRIGGER
R RIGHT SHOULDER
X X
Y Y
A A
B B
RIGHT ANALOG UP
RIGHT ANALOG RIGHT
RIGHT THUMB
RIGHT ANALOG DOWN
RIGHT ANALOG LEFT

From:
https://www.wiki.batocera.org/ - **Batocera.linux - Wiki**

Permanent link:
https://www.wiki.batocera.org/systems:psx?rev=1637474729

Last update: **2021/11/21 06:05**